

SOLAR'S MOST TRUSTED




REC TWINPEAK 2 SERIES

**PREMIUM SOLAR PANELS
100% MADE IN SINGAPORE**


REC TwinPeak 2 Series solar panels feature an innovative design with high panel efficiency and power output, enabling customers to get the most out of the space used for the installation.

Combined with industry-leading product quality and the reliability of a strong and established European brand, REC TwinPeak 2 panels are ideal for residential and commercial rooftops worldwide.


INTEGRATED MANUFACTURING IN SINGAPORE



WAFERS



CELLS




MODULES



ELIGIBLE FOR

REC TWINPEAK 2 SERIES

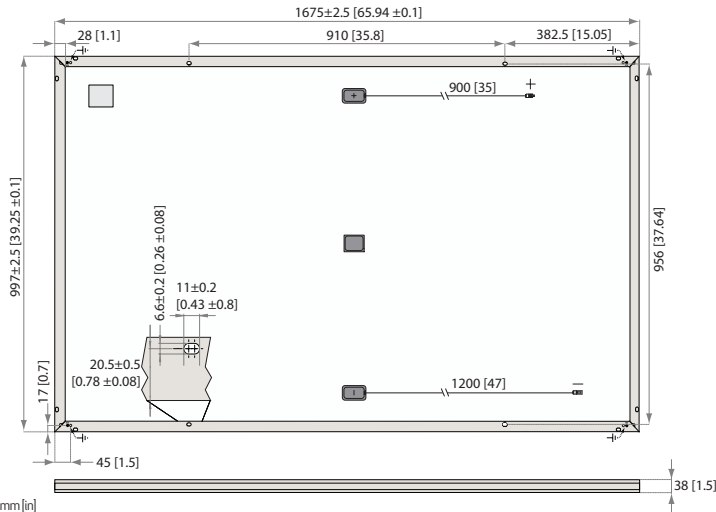

Measurements in mm [in]

ELECTRICAL DATA @ STC

Product Code*: RECxxxTP2

| | 275 | 280 | 285 | 290 | 295 | 300 |
|---------------------------------------|-------|-------|-------|-------|-------|-------|
| Nominal Power - P_{MAX} (Wp) | 275 | 280 | 285 | 290 | 295 | 300 |
| Watt Class Sorting - (W) | -0/+5 | -0/+5 | -0/+5 | -0/+5 | -0/+5 | -0/+5 |
| Nominal Power Voltage - V_{MPP} (V) | 31.5 | 31.7 | 31.9 | 32.1 | 32.3 | 32.5 |
| Nominal Power Current - I_{MPP} (A) | 8.74 | 8.84 | 8.95 | 9.05 | 9.14 | 9.24 |
| Open Circuit Voltage - V_{OC} (V) | 37.9 | 38.2 | 38.4 | 38.6 | 38.9 | 39.1 |
| Short Circuit Current - I_{SC} (A) | 9.59 | 9.64 | 9.69 | 9.75 | 9.80 | 9.85 |
| Panel Efficiency (%) | 16.5 | 16.8 | 17.1 | 17.4 | 17.7 | 18.0 |

Values at standard test conditions STC (airmass AM1.5, irradiance 1000 W/m², cell temperature 25°C).

At low irradiance of 200 W/m² (AM1.5 and cell temperature 25°C) at least 95% of the STC module efficiency will be achieved.

*Where xxx indicates the nominal power class (P_{MAX}) at STC above, and can be followed by the suffix BLK for black framed modules.

ELECTRICAL DATA @ NOCT

Product Code*: RECxxxTP2

| | 189 | 192 | 196 | 199 | 203 | 206 |
|---------------------------------------|------|------|------|------|------|------|
| Nominal Power - P_{MAX} (Wp) | 189 | 192 | 196 | 199 | 203 | 206 |
| Nominal Power Voltage - V_{MPP} (V) | 29.2 | 29.4 | 29.5 | 29.7 | 29.9 | 30.1 |
| Nominal Power Current - I_{MPP} (A) | 6.48 | 6.55 | 6.63 | 6.71 | 6.77 | 6.85 |
| Open Circuit Voltage - V_{OC} (V) | 35.1 | 35.3 | 35.6 | 35.8 | 36.0 | 36.2 |
| Short Circuit Current - I_{SC} (A) | 7.11 | 7.15 | 7.18 | 7.22 | 7.26 | 7.30 |

Nominal operating cell temperature NOCT (800 W/m², AM1.5, windspeed 1 m/s, ambient temperature 20°C).

*Where xxx indicates the nominal power class (P_{MAX}) at STC above, and can be followed by the suffix BLK for black framed modules.

CERTIFICATIONS



UL 1703, Fire classification Type 2; IEC 61215, IEC 61730, IEC 62804 (PID), IEC 62716 (Ammonia), IEC 61701 (Salt Mist level 6), IEC 60068-2-68 (Blowing Sand), ISO 11925-2 (Class E) ISO 9001: 2015, ISO 14001: 2004, OHSAS 18001: 2007

WARRANTY

| | Standard | REC ProTrust | |
|--|----------|------------------|-------|
| Installed by an REC Certified Solar Professional | No | Yes | Yes |
| System Size | Any | ≤25 kW 25-500 kW | |
| Product Warranty (yrs) | 20 | 25 | 25 |
| Power Warranty (yrs) | 25 | 25 | 25 |
| Labor Warranty (yrs) | 0 | 25 | 10 |
| Power in Year 1 | 97.5% | 97.5% | 97.5% |
| Annual Degradation | 0.7% | 0.7% | 0.7% |
| Power in Year 25 | 80.7% | 80.7% | 80.7% |

See warranty documents for details. Some conditions apply.

18.0% EFFICIENCY

20 YEAR PRODUCT WARRANTY

25 YEAR LINEAR POWER OUTPUT WARRANTY

TEMPERATURE RATINGS

| | |
|---|---------------|
| Nominal operating cell temperature (NOCT) | 44.6°C (±2°C) |
| Temperature coefficient of P_{MAX} | -0.36 %/°C |
| Temperature coefficient of V_{OC} | -0.30 %/°C |
| Temperature coefficient of I_{SC} | 0.066 %/°C |

GENERAL DATA

| | |
|---------------|---|
| Cell type: | 6 strings of 20 REC HC multicrystalline PERC |
| Glass: | 0.13" (3.2 mm) solar glass with anti-reflective surface treatment |
| Back sheet: | Highly resistant polyester polyolefin construction |
| Frame: | Anodized aluminum (Available in silver or black) |
| Junction box: | IP67 rated, 3-part with 3 bypass diodes 12 AWG (4 mm ²) PV wire, 39" + 47" (1.0 m + 1.2 m) |
| Connectors: | Stäubli MC4 PV-KBT4/PV-KST4, 12 AWG (4 mm ²) |
| Origins: | Silicon: Made in USA & Norway Wafer/Cell/Module: Made in Singapore |

MAXIMUM RATINGS

| | |
|--------------------------|--|
| Operational temperature: | -40... +185°F (-40... +85°C) |
| Maximum system voltage: | 1000 V |
| Design Loads: | (+) 75.2 lbs/ft ² (3600 Pa) (-) 33.4 lbs/ft ² (1600 Pa) Refer to installation manual |
| Max series fuse rating: | 20 A |
| Max reverse current: | 20 A |

MECHANICAL DATA

| | |
|-------------|--|
| Dimensions: | 65.9 x 39.25 x 1.5 (1675 x 997 x 38 mm) |
| Area: | 17.98 ft ² (1.67 m ²) |
| Weight: | 40.8 lbs (18.5 kg) |

Note! Specifications subject to change without notice.



www.recgroup.com

