

# SUNNY TRIPOWER

## 5000TL / 6000TL / 7000TL / 8000TL / 9000TL



STP 5000TL-20 / STP 6000TL-20 / STP 7000TL-20 / STP 8000TL-20 / STP 9000TL-20



### Economical

- Maximum efficiency of 98%
- Shade management with OptiTrac Global Peak
- Active temperature management with OptiCool

### Flexible

- DC input voltage of up to 1,000 V
- Integrated grid management functions
- Reactive power supply
- Module-tailored plant design with Optiflex

### Communicative

- SMA Webconnect Portal communication
- *Bluetooth*<sup>®</sup> communication
- Simple country configuration
- Multi-function relay as standard

### Simple

- Three-phase feed-in
- Cable connection without tools
- SUNCLIX DC plug-in system
- Integrated ESS DC switch-disconnector
- Easy wall mounting

## SUNNY TRIPOWER

### 5000TL / 6000TL / 7000TL / 8000TL / 9000TL


The three-phase inverter for your home

At home with leading-edge technology and top yields: The Sunny Tripower PV plant with 5 to 9 kW of power is setting new standards for home systems. It features an asymmetric multi-string and Optiflex technology to ensure the highest in flexibility while combining peak efficiency with the OptiTrac Global Peak system to generate the highest in yields. In addition to communication via the external *Bluetooth*-antenna, the PV plant comes with a direct Sunny Portal connection via SMA Webconnect as standard – and now for the first time without data loggers. In addition, the “small” Sunny Tripower comes with integrated grid management functions, is capable of reactive power supply and is suitable for operation with a 30 mA RCD.

# SUNNY TRIPOWER

## 5000TL / 6000TL / 7000TL / 8000TL / 9000TL

Technical data	Sunny Tripower 5000TL	Sunny Tripower 6000TL
<b>Input (DC)</b>		
Max. DC power (@ $\cos \phi = 1$ )	5100 W	6125 W
Max. input voltage	1000 V	1000 V
MPP voltage range / rated input voltage	245 V ... 800 V / 580 V	295 V ... 800 V / 580 V
Min. input voltage / initial input voltage	150 V / 188 V	150 V / 188 V
Max. input current input A / input B	11 A / 10 A	11 A / 10 A
Max. input current per string input A / input B	11 A / 10 A	11 A / 10 A
Number of independent MPP inputs / strings per MPP input	2 / A:2; B:2	2 / A:2; B:2
<b>Output (AC)</b>		
Rated power (@ 230 V, 50 Hz)	5000 W	6000 W
Max. apparent AC power	5000 VA	6000 VA
AC nominal voltage	3 / N / PE; 220 V / 380 V 3 / N / PE; 230 V / 400 V 3 / N / PE; 240 V / 415 V	3 / N / PE; 220 V / 380 V 3 / N / PE; 230 V / 400 V 3 / N / PE; 240 V / 415 V
Nominal AC voltage range	160 V - 280 V	160 V - 280 V
AC power frequency / range	50 Hz, 60 Hz / -5 Hz ... +5 Hz	50 Hz, 60 Hz / -5 Hz ... +5 Hz
Rated power frequency / rated grid voltage	50 Hz / 230 V	50 Hz / 230 V
Max. output current	7.3 A	8.7 A
Power factor at rated power	1	1
Adjustable displacement power factor	0.8 overexcited ... 0.8 underexcited	0.8 overexcited ... 0.8 underexcited
Feed-in phases / connection phases	3 / 3	3 / 3
<b>Efficiency</b>		
Max. efficiency / European Efficiency	98% / 97.1%	98% / 97.4%
<b>Protective devices</b>		
DC disconnect device	●	●
Ground fault monitoring / grid monitoring	● / ●	● / ●
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated	● / ● / -	● / ● / -
All-pole-sensitive residual-current monitoring unit	●	●
Protection class (according to IEC 62103) / overvoltage category (according to IEC 60664-1)	I / III	I / III
<b>General data</b>		
Dimensions (W/H/D)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)
Weight	37 kg (81.6 lb)	37 kg (81.6 lb)
Operating temperature range	-25 °C...+60 °C (-13 °F...+140 °F)	-25 °C...+60 °C (-13 °F...+140 °F)
Noise emission (typical)	40 dB(A)	40 dB(A)
Self-consumption (night)	1 W	1 W
Topology / cooling concept	Transformerless / OptiCool	Transformerless / OptiCool
Degree of protection (according to IEC 60529)	IP65	IP65
Climatic category (according to IEC 60721-3-4)	4K4H	4K4H
Maximum permissible value for relative humidity (non-condensing)	100%	100%
<b>Features</b>		
DC connection / AC connection	SUNCLIX / Spring clamp terminal	SUNCLIX / Spring clamp terminal
Display	Graphic	Graphic
Interface: RS485, Bluetooth, Speedwire/Webconnect	○ / ● / ●	○ / ● / ●
Multi-function relay / Power Control Module	● / ○	● / ○
Warranty: 5 / 10 / 15 / 20 / 25 years	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○
Certificates and approvals (additional on request)	AS 4777, C10/11, CE, CEI 0-21 (>6 kWp), EN 50438 <sup>1</sup> , G59/2, G83/1-1, IEC 61727, MEA <sup>2</sup> , NEN EN 50438, NRS 097-2-1, PEA <sup>2</sup> , PPC, PPDS, RD1699, RD 661/2007, SI 4777, UTE C15-712-1, VDE-AR-N 4105, VDE0126-1-1	
Type designation	STP 5000TL-20	STP 6000TL-20

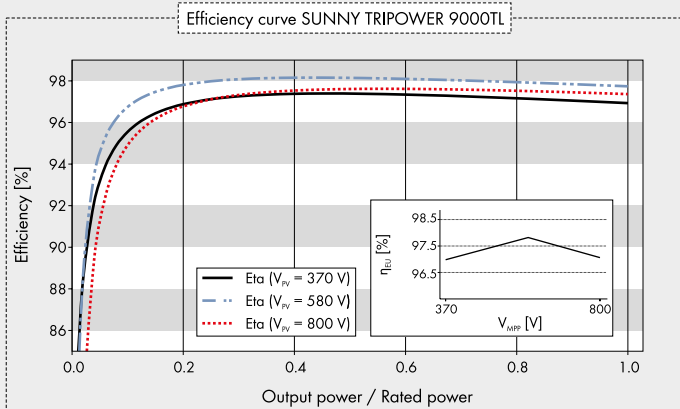

### Accessories



Interface RS485  
485BRD-10



Power Control Module  
PWCBRD-10

<sup>1</sup> Does not apply to all national appendices of EN 50438

<sup>2</sup> Only STP 9000TL-20

● Standard features ○ Optional features – Not available  
Preliminary information – last updated: November 2013  
Data at nominal conditions

Sunny Tripower 7000TL	Sunny Tripower 8000TL	Sunny Tripower 9000TL	
7175 W	8200 W	9225 W	
1000 V	1000 V	1000 V	
290 V ... 800 V / 580 V	330 V ... 800 V / 580 V	370 V ... 800 V / 580 V	
150 V / 188 V	150 V / 188 V	150 V / 188 V	
15 A / 10 A	15 A / 10 A	15 A / 10 A	
15 A / 10 A	15 A / 10 A	15 A / 10 A	
2 / A:2; B:2	2 / A:2; B:2	2 / A:2; B:2	
7000 W	8000 W	9000 W	
7000 VA	8000 VA	9000 VA	
3 / N / PE; 220 V / 380 V	3 / N / PE; 220 V / 380 V	3 / N / PE; 220 V / 380 V	
3 / N / PE; 230 V / 400 V	3 / N / PE; 230 V / 400 V	3 / N / PE; 230 V / 400 V	
3 / N / PE; 240 V / 415 V	3 / N / PE; 240 V / 415 V	3 / N / PE; 240 V / 415 V	
160 V - 280 V	160 V - 280 V	160 V - 280 V	
50 Hz, 60 Hz / -5 Hz ... +5 Hz	50 Hz, 60 Hz / -5 Hz ... +5 Hz	50 Hz, 60 Hz / -5 Hz ... +5 Hz	
50 Hz / 230 V	50 Hz / 230 V	50 Hz / 230 V	
10.2 A	11.6 A	13.1 A	
1	1	1	
0.8 overexcited ... 0.8 underexcited	0.8 overexcited ... 0.8 underexcited	0.8 overexcited ... 0.8 underexcited	
3 / 3	3 / 3	3 / 3	
98% / 97.5%	98% / 97.6%	98% / 97.6%	
●	●	●	
● / ●	● / ●	● / ●	
● / ● / -	● / ● / -	● / ● / -	
●	●	●	
I / III	I / III	I / III	
470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	
37 kg (81.6 lb)	37 kg (81.6 lb)	37 kg (81.6 lb)	
-25 °C ... +60 °C (-13 °F ... +140 °F)	-25 °C ... +60 °C (-13 °F ... +140 °F)	-25 °C ... +60 °C (-13 °F ... +140 °F)	
40 dB(A)	40 dB(A)	40 dB(A)	
1 W	1 W	1 W	
Transformerless / OptiCool	Transformerless / OptiCool	Transformerless / OptiCool	
IP65	IP65	IP65	
4K4H	4K4H	4K4H	
100%	100%	100%	
SUNCLIX / Spring clamp terminal	SUNCLIX / Spring clamp terminal	SUNCLIX / Spring clamp terminal	
Graphic	Graphic	Graphic	
○ / ● / ●	○ / ● / ●	○ / ● / ●	
● / ○	● / ○	● / ○	
● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	● / ○ / ○ / ○ / ○	
AS 4777, C10/11, CE, CEI 0-21 (>6 kWp), EN 50438 <sup>1</sup> , G59/2, G83/1-1, IEC 61727, MEA <sup>2</sup> , NEN EN 50438, NRS 097-2-1, PEA <sup>2</sup> , PPC, PPDS, RD1699, RD 661/2007, SI 4777, UTE C15-712-1, VDE-AR-N 4105, VDE0126-1-1			
STP 7000TL-20	STP 8000TL-20	STP 9000TL-20	

# www.SunnyPortal.com

Professional management, monitoring and presentation of PV plants



www.SMA-Australia.com.au

SMA Solar Technology