


## Bifacial Double Glass Module

DAS-DH108NA

# 440W

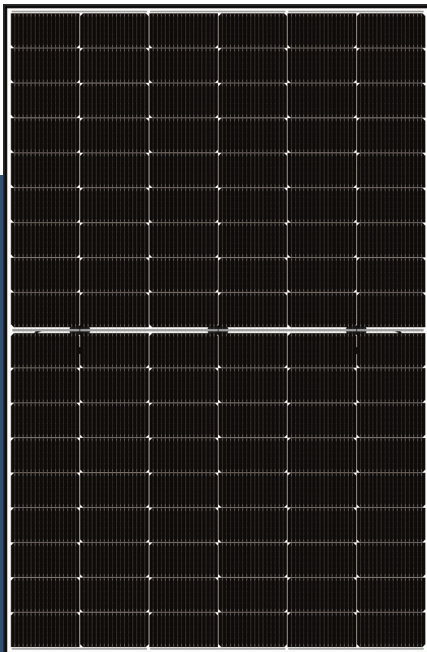

### Key Features



#### High Efficiency

Leading module efficiency in industry, up to 22.5%



#### Excellent Appearance and Performance

Bifacial solar cell, symmetrical design, low risk of micro-crack



#### High Reliability

25 years materials warranty, 30 years power warranty



#### Excellent Rear Side Power Generation

Bifaciality is up to 80%, up to 30% more energy yield than conventional modules



#### Better low irradiance performance

Higher power output even under low irradiance environments like on cloudy or foggy days



#### Extensive Application Scenes

More extensive application scenes, such as BIPV, snow field, vertical installation, high humidity, strong wind and desert region

Maximum Power Output

## 440W

Maximum Module Efficiency

## 22.5%

Ultra-thin Glass

## 1.6mm


### Product and Quality Certifications

IEC 61215, IEC 61730

ISO 9001: Quality Management System

ISO 14001: Environment Management System


ISO 45001: Occupational Health and Safety Management System

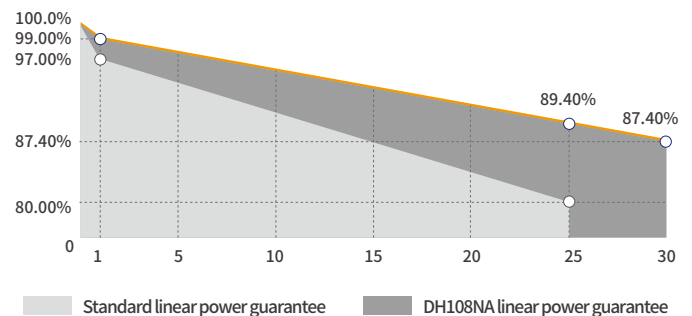



### Leading Product and Power Warranty

**-1.00%** 1st-year Degradation **-0.40%** Annual Degradation **25** years Materials and workmanship warranty **30** years Linear power warranty

## Engineering Drawing (MM)

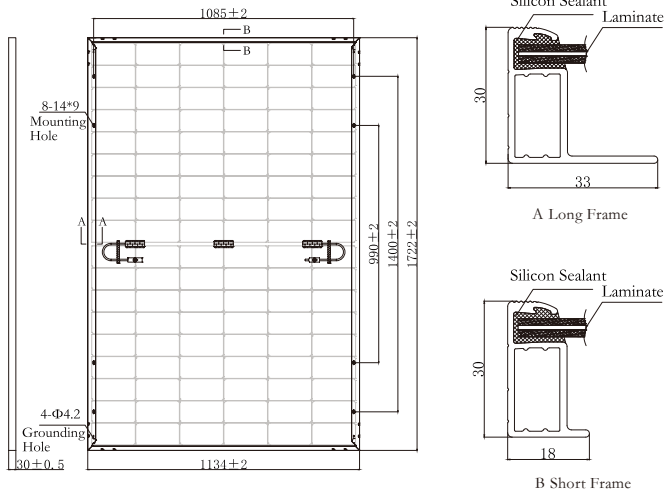

## Characteristic Curves(440W)

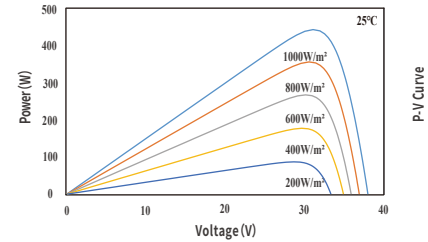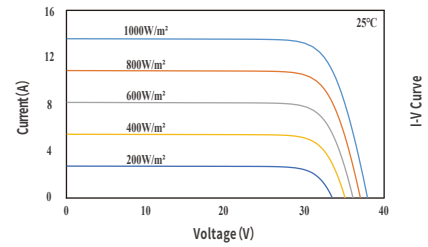

## Electrical Parameters (STC \*)

Nominal Max. Power(Pmax/W)*	440
Open Circuit Voltage(Voc/V)	38.88
Short Circuit Current(Isc/A)	13.98
Operating Voltage(Vmp/V)	33.26
Operating Current(Imp/A)	13.23
Efficiency(%)	22.5
Power measurement tolerance(%)	±3

STC \* : Irradiance = 1000 W/m<sup>2</sup>, Cell Temperature = 25°C, AM = 1.5  
Test condition is based on the front side

## Electrical Parameters (NMOT \*)

Nominal Max. Power(Pmax/W)	329.0
Open Circuit Voltage(Voc/V)	36.69
Short Circuit Current(Isc/A)	11.27
Operating Voltage(Vmp/V)	31.04
Operating Current(Imp/A)	10.60

NMOT \*: Irradiance = 800 W/m<sup>2</sup>, Ambient Temperature = 20°C, AM = 1.5,  
Wind Speed = 1 m/s  
Test condition is based on the front side

## Backside Power Gain (For 440W)

Power Gain	10%	15%	20%	25%	30%
Nominal Max. Power(Pmax/W)	484.0	506.0	528.0	550.0	572.0
Open Circuit Voltage(Voc/V)	38.88	38.88	38.98	38.98	38.98
Short Circuit Current(Isc/A)	15.38	16.08	16.78	17.48	18.17
Operating Voltage(Vmp/V)	33.26	33.26	33.36	33.36	33.36
Operating Current(Imp/A)	14.55	15.21	15.83	16.49	17.15

## Mechanical Parameters

Cell Type	N Type
Module Size	1722 × 1134 × 30mm
Glass Thickness	1.6mm
Module Weight	20.5Kg
Output Cable	4mm <sup>2</sup> , cable length 1200mm
Connector	See note
Junction Box	IP68, 3 bypass diodes
Frame	Anodized aluminium alloy (Black)

Connector\*: 1.QC4.10-cd,2.PV-KST4-EVO2/xy\_UR (male),PV-KBT4-EVO2/xy\_UR(female)  
3.PV-ZH202B,4.YC4,5.QC4.10-cds,6.PV-TT02,7.PV-JK03M2/xy(Plug+Socket)  
8.PV2e,9.PV-DA01M2-XY,10.UTXCFabcde/UTXCMabcde,  
11.PV-KST4-EVO2A/xy,PV-KBT4-EVO2A/xy.

## Temperature Coefficients

Short Circuit Current(Isc)	+0.045%/°C
Open Circuit Voltage(Voc)	-0.250%/°C
Nominal Max. Power(Pmax)	-0.300%/°C
NMOT	42 ± 2°C

Fire Safety Class:: Class C

## Operating Parameters

Max. System Voltage	DC1500V
Power output tolerance	±5W
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rated Current	30A
Designed Mechanical Load	Positive 3600Pa ,Negative 1600Pa
Packing Data	36 pcs/Pallet; 216(20GP); 936(40HQ)

